

MARINE COMPRESSOR PUMPS & RESERVOIRS

GH & GH JET RANGE
GH OT RB18 RANGE



GH RANGE

Our range of compressor pumps and reservoirs are designed for use in the professional marine industry.

The compression pump units are used to pressurize the fresh water or sea water distribution on board.

GH JET RANGE

The GH JET range consists of:

- a pump composed of :
Motor 230VAC single phase – 230/400VAC Three phase - 0.37kw
Pump cast iron case, noryl impeller, stainless steel shaft
Flow-pressure 1m³/h at 40m
- a membrane tank (capacity 8-24-60-100 or 300 liters vertical or horizontal), galvanized tank on request
- A pressure switch for the pump (1.5/2.5 bars)
- A manometer



230V SINGLE PHASE	230/400V THREE PHASE	CAPACITY (L)
GH230mono-0.37-8L-JET M-ED	GH230/400-0.37-8L-JET T-ED	8
GH230mono-0.37-24L-JET M-ED	GH230/400-0.37-24L-JET T-ED	24
GH230mono-0.37-60L-JET M-ED	GH230/400-0.37-60L-JET T-ED	60
GH230mono-0.37-100L-JET M-ED	GH230/400-0.37-100L-JET T-ED	100
GH230mono-0.37-200L-JET M-ED	GH230/400-0.37-200L-JET T-ED	200
GH230mono-0.37-300L-JET M-ED	GH230/400-0.37-300L-JET T-ED	300

GH OT RB18 RANGE


The RB18 range consists of:

- A pump composed of :
Motor 24v-230v-400v – 0.37Kw – 3000 rpm
Pump close-coupled self-priming bronze, bronze case and impeller, stainless steel shaft
Flow-pressure 1m³/h to 30m
- A membrane tank (capacity 8-24-60-100 or 300 liters vertical or horizontal) galvanized tank on request
- A pressure switch for the pump (1.5/2.5 bars)
- A manometer
- Seawater version: flange adaptor and accessories in stainless steel, pressure switch and manometer designed for seawater use

FRESH WATER 24V DC	SEA WATER 24V DC	FRESH WATER 230/400 AC	SEA WATER 230/400 AC	CAPACITE (L)
GH24-0.37-8L-OT RB18-ED	GH24-0.37-8L-OT RB18-EM	GH230/400-0.37-8L-OT RB18-ED	GH230/400-0.37-8L-OT RB18-EM	8
GH24-0.37-24L-OT RB18-ED	GH24-0.37-24L-OT RB18-EM	GH230/400-0.37-24L-OT RB18-ED	GH230/400-0.37-24L-OT RB18-EM	24
GH24-0.37-60L-OT RB18-ED	GH24-0.37-60L-OT RB18-EM	GH230/400-0.37-60L-OT RB18-ED	GH230/400-0.37-60L-OT RB18-EM	60

GH – DIMENSIONS


	GH OT RB18 8L		GH OT RB18 24L		GH OT RB18 60L		GH OT RB18 100L	
	GH JET 8L		GH JET 24L		GH JET 60L		GH JET 100L	
	AC	DC	AC	DC	AC	DC	AC	DC
A	610	620	610	620	680	695	735	745
B	Ø200		Ø360		Ø360		Ø450	
C	360	430	440	510	830	830	930	930
Delivery	1" - 26/34		1" - 26/34		1" - 26/34		1" - 26/34	
Suction	1" - 26/34		1" - 26/34		1" - 26/34		1" - 26/34	
Weight	15 kg	26 kg	18 kg	29 kg	30 kg	40 kg	45 kg	56 kg

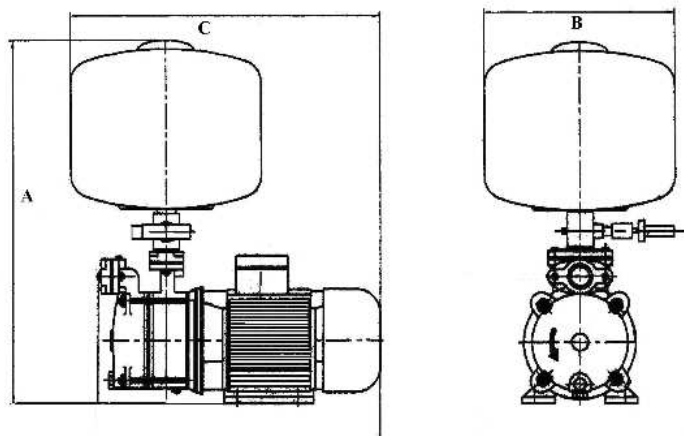

Capacity 8L et 24L (vertical)



Many options available
Please consult us

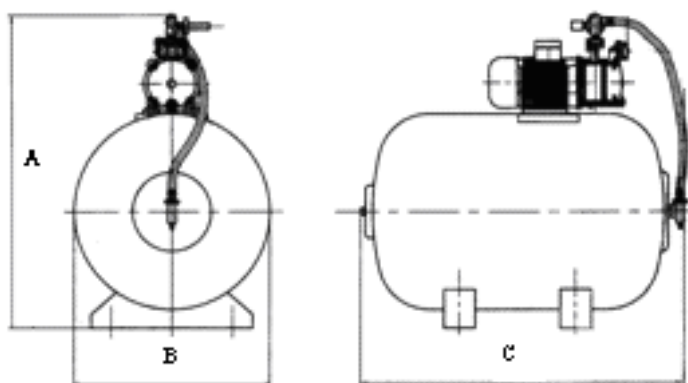

Capacity 60L et 100L (horizontal)