# **WATER SEPARATORS**











ENAG's water separators are designed for marine applications.

Made of a frame, a water separator and a net their high efficiency enables restriction of water and humidity aspiration by the fans located in the engine rooms. Their installation is easy and no specific maintenance is required. Options such as filters, mask louver and weather proof hatches are available.


Manufactured in marine grade aluminum with a polyester paint finish (RAL 9010 white, other colors on request) or in stainless steel (AISI 316).


Recommended for air speed of approximately 4–6 m/s for SEA range and 4–8 m/S for SEAX range the speed is measured in function of the front surface and air flow.

Efficiency is calculated following the EN13030:2001 standards.







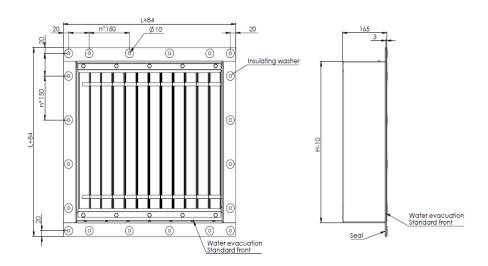



# WATER SEPARATORS EFFICIENCY


### **SEA RANGE**



#### Filtration effectiveness 100.0 99.0 Effectiveness, 98.0 97.0 96.0 95.0 7.0 1.0 0.0 2.0 4.0 5.0 6.0 Core velocity, m/s

# **SEAX RANGE**



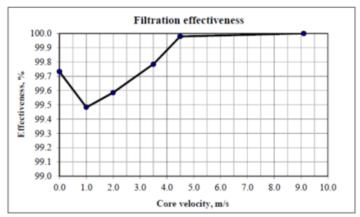

Efficiency measured for 75mm/h precipitation rate

