

Charger/discharger Mobile Bank

New

Our new range of mobile chargers / dischargers provides a solution for the maintenance of your batteries from 24V to 175V (Pb & NiCd).


Using a constant current pre-set according to the battery specification, the charge and discharge operations can be carried out in secure conditions.

The operating voltage range is adjustable from 24V to 175V and the current range from 1A to 160A, depending on the model.

Standard models are mobile and easily moved in the workshop.



Available with powers of 6kW and 12kW (18kW on load) this range offers a new user interface using touch screen technology. The Human Machine Interface (HMI) provides great flexibility when programming your parameters, setting up your automatic maintenance operations and acquiring test results.

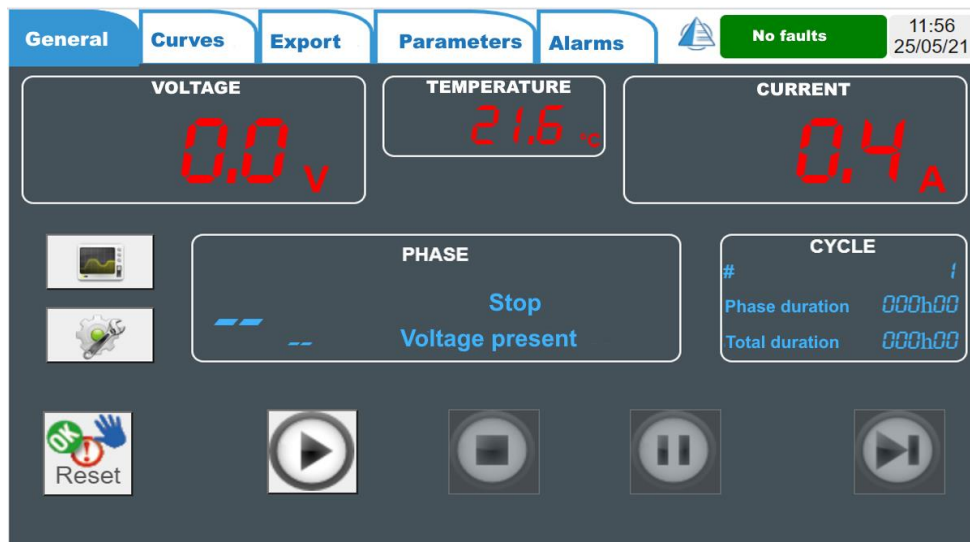

Main technical specification

Input:

- Voltage: 400V/440Vac \pm 10% three phases
- Frequency: 50/60Hz \pm 5 %.
- Current: < 18A (depending on the model)
- I/O galvanic isolation: yes

Use:

The voltage is adjustable depending on the battery specification.

- Model 6000W
 - 24V – max voltage 38V / 160A
 - 48V - max voltage 75V / 80A
 - 72V - max voltage 115V / 52A
 - 110Vcc - max voltage 175V / 35A
- Model 12000W
 - 24V - max voltage 38V / 160A
 - 48V - max voltage 75V / 160A
 - 72V - max voltage 115V / 106A
 - 110Vcc - max voltage 175V / 70A

Display and Control:

- HMI with touch screen giving access to:
 - Selection of charge or discharge voltage
 - Selection of charge or discharge current
 - Setting the charge or discharge time
 - Boost, float, absorption conditions (on charge)
 - Selection of battery type (Pb, NiCd)
 - Programmable charge / discharge cycle
 - Remote setting and control: by web interface (no specific software)
 - Settings saved and exportable
 - Recording of curves and cycles
- ON/OFF switch
- Emergency switch
- Start cycle push button
- Stop cycle push button
- Standby cycle push button
- Remote control switch
- White indicator light: mains input present
- Green indicator light: charger On
- Red indication light: charger fault
- Orange indicator light: flashing - cycle in standby
Steady - end of cycle
- Blue indicator light: remote control possible

Data / Measurement report:

- Charging curve: Ubat (V), Ibat (A), t (date, hour: min), battery temperature
- Ok / fail test report according to programmed cycle (with all cycle steps and U / I T measurement)
- Data available in CSV or pdf format

Protection:

- Input by 3ph + E tri-circuit breaker
- Output:
 - Polarity inversion
 - Short circuits
 - Overload

Presentation:

- Mobile equipment on wheels
- Input cable supplied without connector - 10m (1)
- Output cables supplied without connectors - 5m (1)
- Cable reel on top

Communication interface:

- TCP/IP Interface: available

Mechanical specifications:

- Height: 1190 mm
- Width: 558 mm
- Depth: 990 mm
- Protection index: IP33

Environmental specifications:

- Operating temperature: -20 ° C to + 40 °
- Storage temperature: -20 ° C to + 70 ° C
- Humidity: 0 to 95% non-condensing

Option:

- Temperature probe - 4m cable
- Output connector: Andersen type, Harting
- Connection clamps
- Retractable handles
- Signal mast
- WIFI Interface

Standard:

- EN 61000-6-2, EN 61000-6-4
- EN 62368
- Certificate CE

FC-BCD-EN-C

The information contained in this leaflet is not of a contractual nature. ENAG reserves the right to amend the technical details of its products without advance notice.

ENAG S.A.S. - 31 Rue Marcel Paul - Z.I. Kerdroniou Est - 29000 Quimper – France

Tel : + 33 2 98 55 51 99 – Fax : + 33 2 98 55 51 67 - E-mail : contact@enag.fr – Site : www.enag.fr